

Curdlee®

Technical Data			
Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581/EN 649		Polyurethane coated Homogeneous Sheet
Material			Polyvinyl chloride
Coating			TRUESHIELD XP
Safety criteria			
TVOC after 28 days	ISO 16000-6		<10µg/m³
DOP content	EN 14372		N.D.
Migration of certain elements	EN 71-3		Pass
Performance behaviour			
Roll width	ISO 24341/EN 426	m	2
Roll length	ISO 24341/EN 426	m	15/20
Overall thickness	ISO 24341/EN 428	mm	2.0
Dimensional stability	ISO 23999/EN 434	-	X (horizontal):0.4% Y (vertical):0.4%
Wear resistance	EN660-2/EN649	group	T
Chemical resistance	ISO 26987/EN 423		Grade 0: No Stain
Color fastness	ISO 105-B02	rating	≥ 6
Static electrical charge	EN 1815	KV	≤ 2.0
Classification			
Domestic	EN 685	class	23 heavy duty
Commercial	EN 685	class	34 very heavy duty
Industrial	EN 685	class	43 heavy duty
Additional property			
Castor Chair  ✓	Underfloor Heating  ✓	Anti-bacteria  ✓	
Antistatic Behaviour  ✓	Chemical Resistance  ✓		

ArmstrongFlooring™
Walk On. Walk Strong.

Medintech Plus® | Medintone®

Technical Data				Medintech Plus	Medintone
Characteristics	Standard	Unit	Result	Result	Result
Type of flooring	ISO 10581-EN 649		Homogeneous Sheet	Homogeneous Sheet	Homogeneous Sheet
Material			Polyvinyl chloride	Polyvinyl chloride	Polyvinyl chloride
Coating			Diamond 10"	TRUESHIELD 2.0"	
Safety criteria					
Flammability	EN 13501-1	class	Blfl-S1	Blfl-S1	
Slip resistance	DIN 51130 / EN DIN 16165	group	R9	R9	
Dynamic coefficient of friction	EN 13893 / EN 14041	class	DS	DS	
Performance behaviour					
Sheet width	ISO 24341-EN 426	m	2	2	
Sheet length	ISO 24341-EN 426	m	15/20	15/20	
Overall thickness	ISO 24346-EN 428	mm	2.0	2.0	
Total weight	ISO 23997-EN 430	kg/m²	2.8	2.65	
Wear resistance	EN 649	group	T	T	
Binder conertmt	EN ISO10581	Type	Type1	Type1	
Residual indentation	ISO 24343-1-EN433	mm	0.03	0.03	
Dimensional stability	ISO 23999-EN 434	-	X :<0.4% Y :<0.4%	X :<0.4% Y :<0.4%	
Impact sound insulation	EN ISO 717-2	dB	3	4	
Color fastness	ISO 105-B02	rating	≥6	≥6	
Resistance to staining	EN 423		No Stain 0	No Stain 0	
Classification					
Domestic	ISO 10874-EN 685	class	23 heavy duty		
Commercial	ISO 10874-EN 685	class	34 very heavy duty		
Industrial	ISO 10874-EN 685	class	43 heavy duty		
Additional property					
Castor Chair  ✓		Antistatic Behaviour  ✓			
Underfloor Heating  ✓		Chemical Resistance  ✓			

ArmstrongFlooring™
Walk On. Walk Strong.

ArmstrongFlooring™



ArmstrongFlooring™

Simpurity®

Curdlee®

Medintech Plus®

Medintone®

Simpurity®

Technical Data			
Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581-EN 649		Homogeneous Sheet
Material			Polyvinyl chloride
Coating			Diamond 10"
Safety criteria			
Flammability	GB 8624-2012/EN 13501-1	class	B1/Bfl-s1
Slip resistance	DIN 51130 / EN DIN 16165	group	R9
Dynamic coefficient of friction	EN 13893/ EN 14041	class	DS
VOC	GB 18586-2001		Pass
DOP content	EN 14372		N/D
Heavy metal	EN 71-3		Pass
Impact sound reduction	ISO 10140/ISO 717-2	dB	3
Performance behaviour			
Sheet width	ISO 24341-EN 426	m	2
Sheet length	ISO 24341-EN 426	m	15/20
Overall thickness	ISO 24346-EN 428	mm	2.0
Weight	ISO 23997-EN 430	kg/m²	2.99
Wear resistance	EN 649	group	T
Binder content	EN ISO 10581	Type	Type I
Dimensional stability	ISO 23999-EN434	-	X:<0.4% Y:<0.4%
Color fastness	ISO 105-B02	rating	6
Resistance to staining	EN 423		No Stain 0
Static electrical propensity	EN 1815	KV	≤ 2.0
Classification			
Domestic	ISO 10874-EN 685	class	23 heavy duty
Commercial	ISO 10874-EN 685	class	34 very heavy duty
Industrial	ISO 10874-EN 685	class	43 heavy duty
Additional property			
Castor Chair  ✓	Underfloor Heating  ✓	Anti-bacteria  ✓	
Antistatic Behaviour  ✓	Chemical Resistance  ✓	Formaldehyde  ✓	

ArmstrongFlooring™
Walk On. Walk Strong.

HOM


Simpurity®

ArmstrongFlooring



Peaceful

K822A - 602

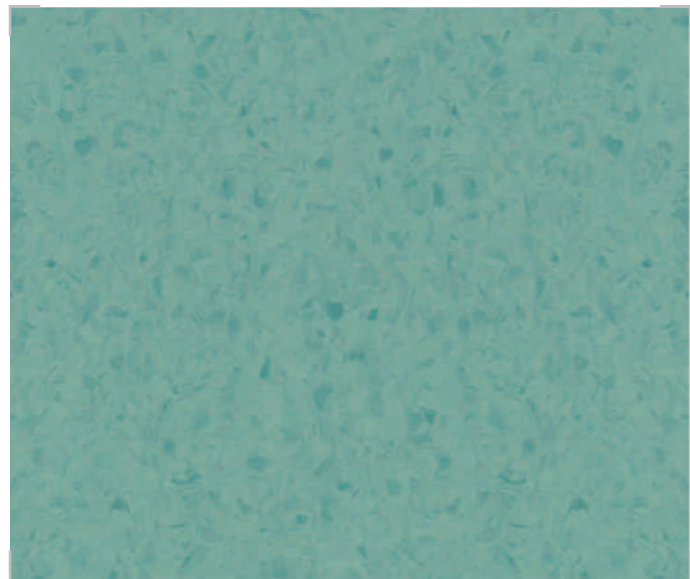


Soft Green

K822A - 502



Light Coir

K822A - 101

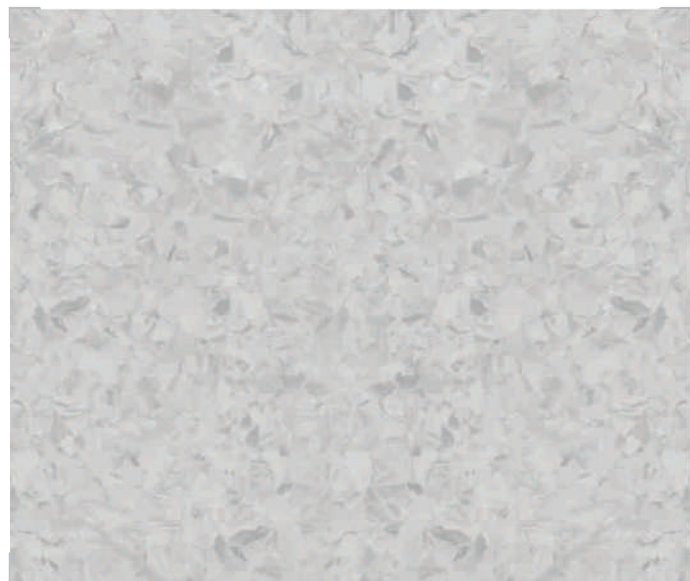

Gently Grey

K822A - 001



Plow Rock

K822A - 002

Curdlee®

ArmstrongFlooring



Plume

K866 - 202



Shadow

K866 - 001




Clouds

K866 - 002



Hazy Moon

K866 - 004

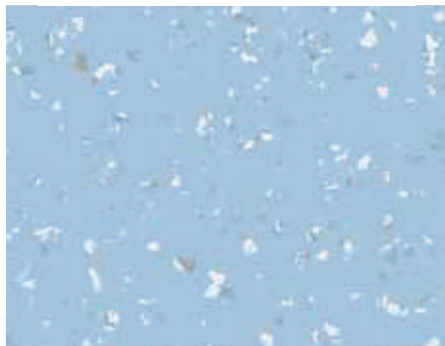

Glacier

K866 - 601




Lavender

K866 - 701




Pink Sakura

K866 - 702

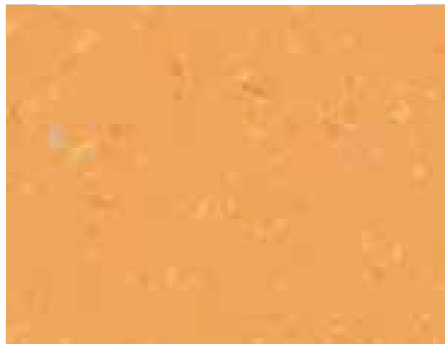

Sunkist

K866 - 703

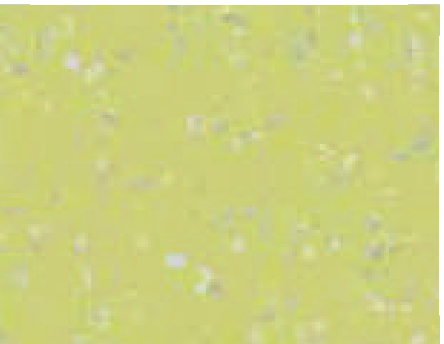

Lime Green

K866 - 504




Turquoise

K866 - 502

ArmstrongFlooring™

Medintech Plus®

ArmstrongFlooring

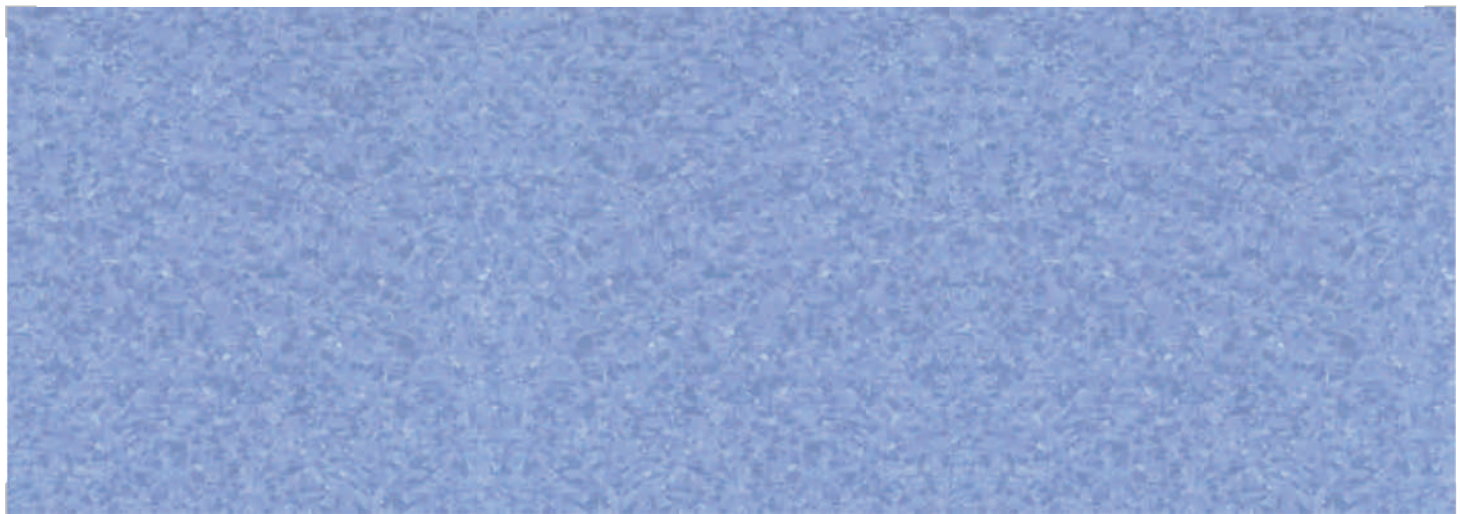

Blue Skies

K811A - 629



Lxia

K811A - 001



Freesia Pearl

K811A - 106



Carthamus Champagne

K811A - 212



Silver Grey

K811A - 002



Smoke

K811A - 003



Rock

K811A - 004




Cloud

K811A - 005



Turquoise

K811A - 533



Peak Green

K811A - 532



Orange Zest

K811A - 318



Banana

K811A - 331



Rouge

K811A - 435

Medintone®

ArmstrongFlooring



Cool White

FPH5300271J



Sand Light

FPH5319271J



Gray Light

FPH5301271J



Indigo Mid

FPH5350271J



Golden Sun

FPH5423271J



Zaffron

FPH5424271J




All Fried Up

FPH5402271J



Lime Grass

FPH5408271J

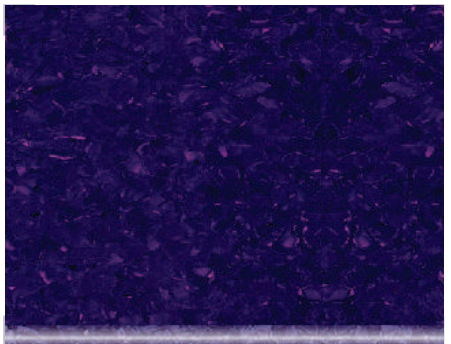

Hydrangea

FPH5428271J