




ArmstrongFlooring™

Carpet Tile

Carpet Tile Structure

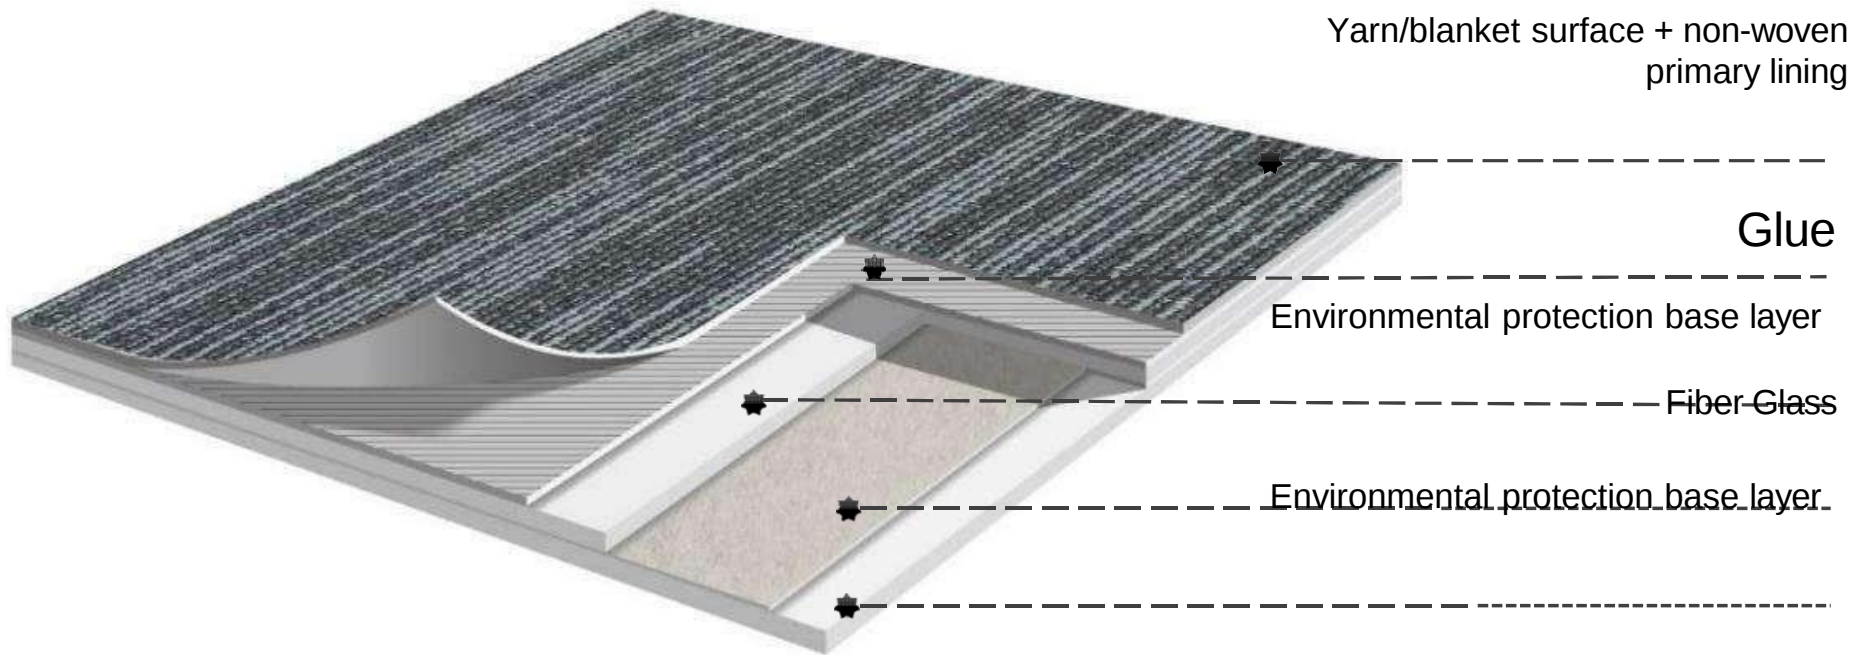

CRI green label plus

PRO-CARE Fiber

- Best collection of solution dyed nylon fiber
- Rich in color and easy to clean, It's colorfast with high color fastness
- Advanced protective and antistatic treatment which ensure the excellent performance and strong wear resistance of each fiber



Solution dyed

**Colour
Fastness**



Printed



Carpet Tile Product Line



Dream Color

Immerse yourself in the Dream Color, and explore the inspiration of modern minimalist carpet design.


The collision of straight stripes and colors creates a stunning picture of each space. Shades of grey, blue, green and orange are combined with linear geometric textures to create a variety of modern carpet styles.

Each carpet is a work of art that embodies simplicity, clarity and elegance.

Dream Color



Dream Color



C01P1211-01
Twilight



C01P1211-02
Pediment



C01P1211-03
Triphane



C01P1211-04
Azul Bahia



C01P1211-09
Jasmine



C01P1211-10
Marigold

Specification



- Yarn: PRO-CARE Fiber Nylon
- Dye method: 100% Solution Dyed
- Pile Weight: 16oz
- Size: 25x100cm
- Pile Height: 4.0 ± 0.5mm
- Total Height: 6.0 ± 0.5mm
- Backing : PRO-CARE backing

Norm Core D1



G02P1211



G02P1211- 01



G02P1211- 02



G02P1211- 05




G02P1211- 11



G02P1211- 21



G02P1211- 12

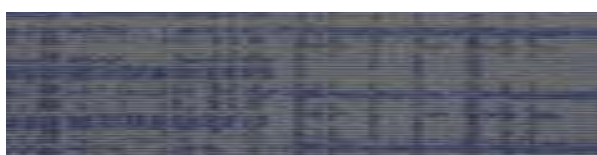


G02P1211- 22

ArmstrongFlooring



G02P1211-01


ArmstrongFlooring™





G02P1211-01-02

ArmstrongFlooring™





G02P1211-05

ArmstrongFlooring™





G02P1211-11



Armstrong Flooring™



G02P1211-12


ArmstrongFlooring™





G02P1211-21

ArmstrongFlooring™




Specification 技术指标


Product Name 产品名称	G02P121
Product Code 产品编码	LAGOM224
Tufted construction 簇绒结构	Multi-Level loop 高低圈绒
Fiber 纱线	100% Nylon 100% 尼龙
Dye method 染色工艺	Solution Dyed 原液染色
Gauge 针距	1/10
Tufted weight(g/m ²) 绒重(克/平方米)	550±5%
Tile size(mm) 地毯尺寸(毫米)	250x1000
Pile height(mm) 平均绒高(毫米)	4.0±0.5
Total thickness(mm) 总厚度(毫米)	6.5±0.5
Standard Backing 标准底背	Glass fiber reinforced PVC

ArmstrongFlooring®


Recommended installation methods 建议铺装方式



Ashlar
上下错半



Herringbone
人字铺



Basketweave
网篮形



Anti-fouling




Anti-static



Environmental



Passed various tests



Fashion colors



100% B,C,F Yarn



Reduced Flammability




Isolation acoustic



Colorfast



Chair roulettes



No edge ravel




Wear resistance



Soil Resistance




Wear Warranties



Dimensional Stability



Long life-span



Easy to transport



Non-mold



ArmstrongFlooring™

T h a n k s !