



DSGN TWEED
DSGN CLOUD
PIXEL
PATCHWORK
FIRST DECODE
FIRST DEFINE
FIRST SWAY

FAST

modulyss®







TRACK

DSGN TWEED

PART OF THE DSGN DESIGN CONCEPT

The iconic tweed fabric serves as an inspiration for our DSGN Tweed collection. Brought to a contemporary setting, this dense textured pattern creates an artisanal feel that is both timeless and chic. Next to muted and earthy colour tones, we've added some bright colours that coordinate perfectly with DSGN Cloud, DSGN Absolute and our First collection.

AVAILABLE COLOURS

 039	 061	 141	 204	 313
 340	 569	 695	 822	 826
 912	 914	 932	 965	 990
 995				



DSGN TWEED 995




DSGN TWEED 061, 141

TECHNICAL DATASHEET

CARPET TILES

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile backing with minimum 70% post-industrial recycled content	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.600 g/m² Ca. 135,7 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.070 m²K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 680 g/m² Ca. 20,1 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔLw: 24 dB
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 420 g/m² Ca. 12,4 oz./yd²	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 αw: 0,15 Hz 125 250 500 1000 2000 4000 αs 0,00 0,05 0,06 0,17 0,29 0,37
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6,7 mm Ca. 0,26"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,3 mm Ca. 0,13"	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10⁶ Ohm
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,127 g/cm³ Ca. 3.425 oz./yd³	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 cm x 50 cm box: 5m² pallet: 20 boxes
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 221.000 /m² Ca. 184.783 /yd²	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC2	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2 %
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 985 A : continuous use	GUT-NR	CD42F042
FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 Bfl -s1	LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.











DSGN CLOUD

PART OF THE DSGN DESIGN CONCEPT

DSGN Cloud's pattern is inspired by cloud formations, the muse of many artists. Guided by our deep connection to nature, we created a tranquil and organic carpet tile design with a soft transition between lighter and darker tones. The colour variations set a dreamy and transient mood, incorporating both neutral and bright hues that will lend the perfect ambience to your space.

AVAILABLE COLOURS

 039	 061	 141	 204	 313
 340	 569	 695	 822	 826
 912	 914	 932	 965	 990
 995				



DSGN CLOUD 822




DSGN CLOUD 695

TECHNICAL DATASHEET

CARPET TILES

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥4
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile, backing with minimum 70% post-industrial recycled content	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.600 g/m² Ca. 135,7 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.070 m² K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 680 g/m² Ca. 20,1 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔLw: 26 dB
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 420 g/m² Ca. 12,4 oz./yd²	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 αw: 0,15 Hz 125 250 500 1000 2000 4000 αs 0,00 0,03 0,06 0,18 0,31 0,39
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6,7 mm Ca. 0,26"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,3 mm Ca. 0,13"	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10⁶ Ohm
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,127 g/cm³ Ca. 3.425 oz./yd³	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 cm x 50 cm 19,7" x 19,7" box: 5m² 5,98 yd² pallet: 20 boxes
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 193.000 /m² Ca. 161.371 /yd²	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC2	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2 %
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 985 A : continuous use	GUT-NR	CC1A5FAA
FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1: Bfl-s1 ASTM E-648: Class 1	LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.




PIXEL

PART OF THE VINTAGE DESIGN CONCEPT

Designed for versatility, the Pixel collection is available in both carpet tiles and broadloom. Its durable loop pile construction ensures longevity and resilience, making it ideal for high-traffic environments. The refined colour palette, featuring shades of grey, brown, blue, turquoise, and red, is engineered to harmonise with a wide range of interior designs, delivering both practicality and sophistication.

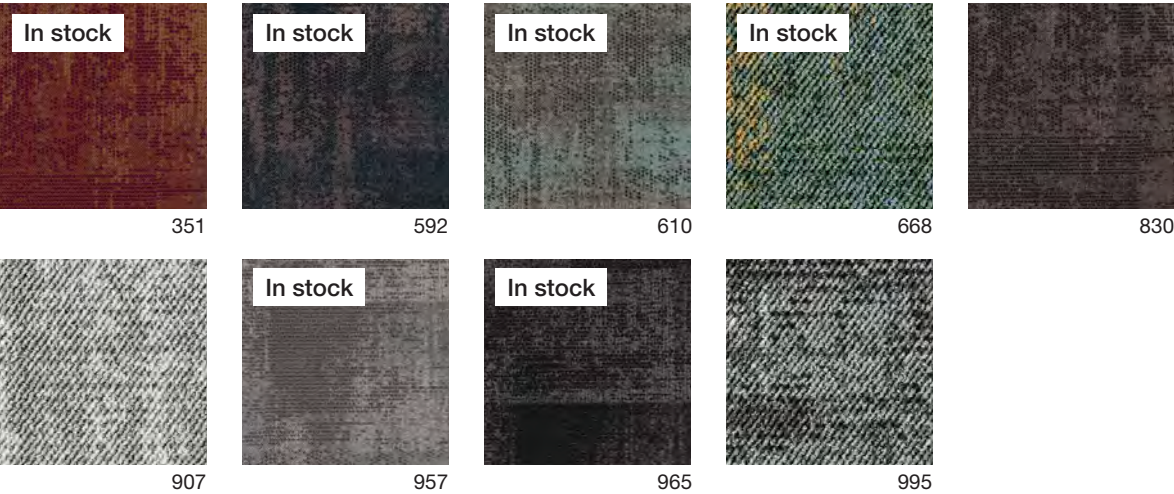AVAILABLE COLOURS



Q Also available
in broadloom



PIXEL 592




PIXEL 610

TECHNICAL DATASHEET

CARPET TILES

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop , printed Tufté 1/10" Bouclé , imprimé Getuftet 1/10" Schlinge , gedruckt Getuft 1/10" Luspool, bedrukt	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5-6
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA 6	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile backing with minimum 70% post-industrial recycled content	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.400 g/m² Ca. 129,8 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.063 m² K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 605 g/m² Ca. 17,8 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔLw: 23 dB
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 372 g/m² Ca. 11,0 oz./yd²	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 αw: 0,15 Hz 125 250 500 1000 2000 4000 αs 0,00 0,00 0,06 0,15 0,28 0,31
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6,6 mm Ca. 0,26"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,1 mm Ca. 0,12"	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10⁶ Ohm
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,120 g/cm³ Ca. 3.236 oz./yd³	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19,7" x 19,7" box: 5 m² 5,98 yd² pallet: 20 boxes
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 218.000 /m² Ca. 182.274 /yd²	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	9, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC1	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2 %
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 985 A : continuous use	GUT-NR	3CBEDAF8
FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1: Bfl-s1 ASTM E-648: Class 1	LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.




PATCHWORK

PART OF THE VINTAGE DESIGN CONCEPT

Patchwork adds a gentle touch of authentic vintage charm to any setting. Nine rich colour variations create a warm and welcoming atmosphere that inspires elegance and sophistication. Take a trip down memory lane, while Patchwork creates a new story in every room.

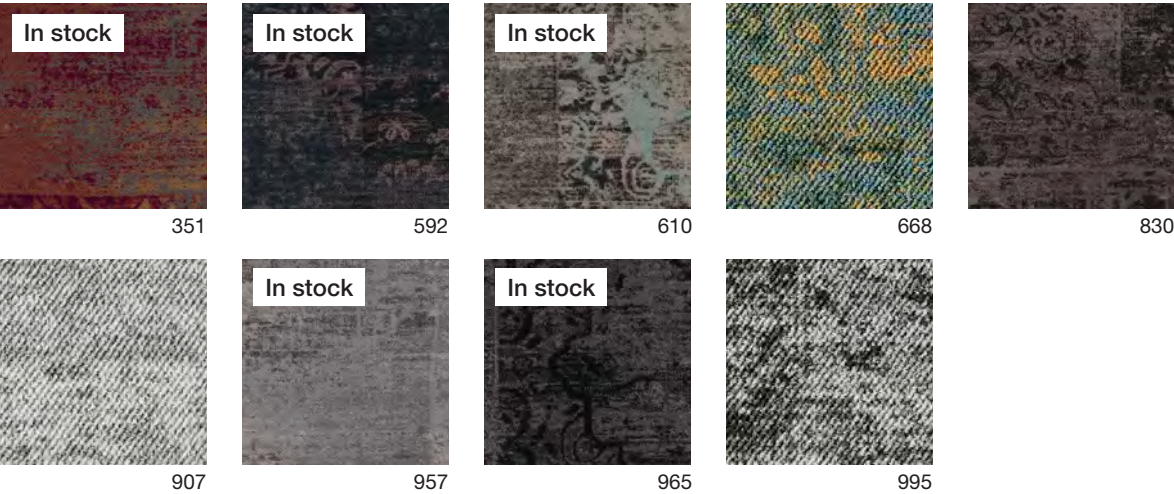AVAILABLE COLOURS



Q Also available
in broadloom



PATCHWORK 610




PATCHWORK 668

TECHNICAL DATASHEET

CARPET TILES

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop , printed Tufté 1/10" Bouclé , imprimé Getuftet 1/10" Schlinge , gedruckt Getuft 1/10" Luspool, bedrukt	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5-6
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA 6	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile backing with minimum 70% post-industrial recycled content	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.400 g/m² Ca. 129,8 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.063 m² K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 605 g/m² Ca. 17,8 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔLw: 23 dB
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 372 g/m² Ca. 11,0 oz./yd²	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 αw: 0,15 Hz 125 250 500 1000 2000 4000 αs 0,00 0,00 0,06 0,15 0,28 0,31
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6,6 mm Ca. 0,26"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,1 mm Ca. 0,12"	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10⁶ Ohm
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,120 g/cm³ Ca. 3.236 oz./yd³	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19,7" x 19,7" box: 5 m² 5,98 yd² pallet: 20 boxes
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 218.000 /m² Ca. 182.274 /yd²	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	9, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC1	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2 %
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 985 A : continuous use	GUT-NR	3CBEDAF8
FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1: Bfl-s1 ASTM E-648: Class 1	LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.




FIRST DECODE

PART OF THE FIRST DESIGN CONCEPT

Experience the captivating interplay between light and dark with First Decode, where your space transcends into a realm of subtle drama and atmospheric allure. This carpet tile collection features a linear pattern and loop pile texture, and is available in dark, vibrant hues.

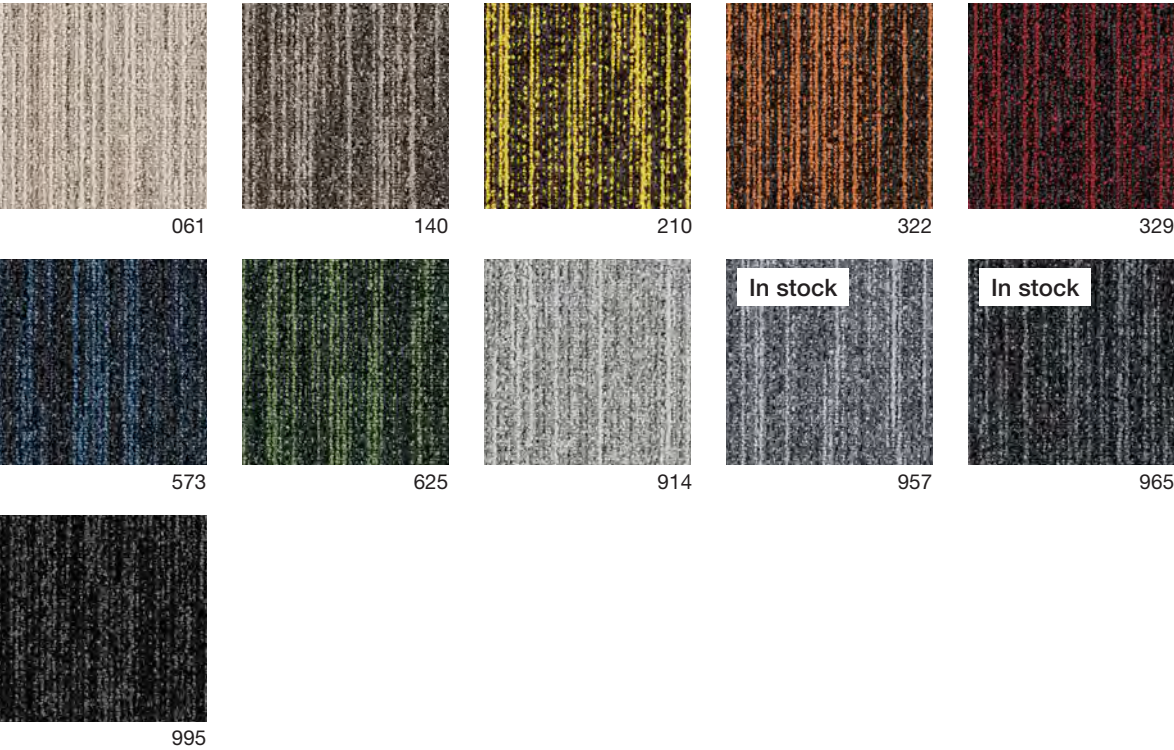AVAILABLE COLOURS



FIRST DECODE 329




FIRST DECODE 625, 995

TECHNICAL DATASHEET

CARPET TILES

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile backing with minimum 70% post-industrial recycled content	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.500 g/m² Ca. 132,8 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,066 m²K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 590 g/m² Ca. 17,4 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔLw: 25 dB
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 360 g/m² Ca. 10,6 oz./yd²	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 αw: 0,15 Hz 125 250 500 1000 2000 4000 αs 0,02 0,02 0,06 0,15 0,27 0,34
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6,5 mm Ca. 0,26"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2,9 mm Ca. 0,11"	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10² Ohm
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,124 g/cm³ Ca. 3.344 oz./yd³	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19,7" x 19,7" box: 5 m² 5,98 yd² pallet: 20 boxes
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 202.000 /m² Ca. 168.896 /yd²	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	11
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC1	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2 %
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 985 A : continuous use	GUT-NR	D8715FC9
FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 Bfl -s1	LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.



FIRST DEFINE

PART OF THE FIRST DESIGN CONCEPT

First Define, where soft lines embrace a minimalistic ethos, seamlessly blending simplicity with sophistication to craft a refined aesthetic. This loop pile carpet tile collection features a linear design and dark, vibrant colour palette.

AVAILABLE COLOURS




061



140




210



322



329




573



625



914



957



965



995



FIRST DEFINE 965





FIRST DEFINE 061

TECHNICAL DATASHEET

CARPET TILES

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile backing with minimum 70% post-industrial recycled content	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.500 g/m² Ca. 132,8 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,066 m²K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 590 g/m² Ca. 17,4 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔLw: 25 dB
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 360 g/m² Ca. 10,6 oz./yd²	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 αw: 0,15 Hz 125 250 500 1000 2000 4000 αs 0,02 0,02 0,06 0,15 0,27 0,34
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6,5 mm Ca. 0,26"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2,7 mm Ca. 0,11"	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10⁶ Ohm
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,124 g/cm³ Ca. 3.344 oz./yd³	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19,7" x 19,7" box: 5 m² 5,98 yd² pallet: 20 boxes
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 202.000 /m² Ca. 168.896 /yd²	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	11
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC1	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,20 %
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 4918 A : continuous use	CERTIFICATION QB-UPEC NR. DU CERTIFICATION	U,P,E,C ₀ 329T-012.1
FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 Bfl -s1	GUT-NR	68E92E25
		LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulys is member of DGNB, the German Sustainable Building Council.

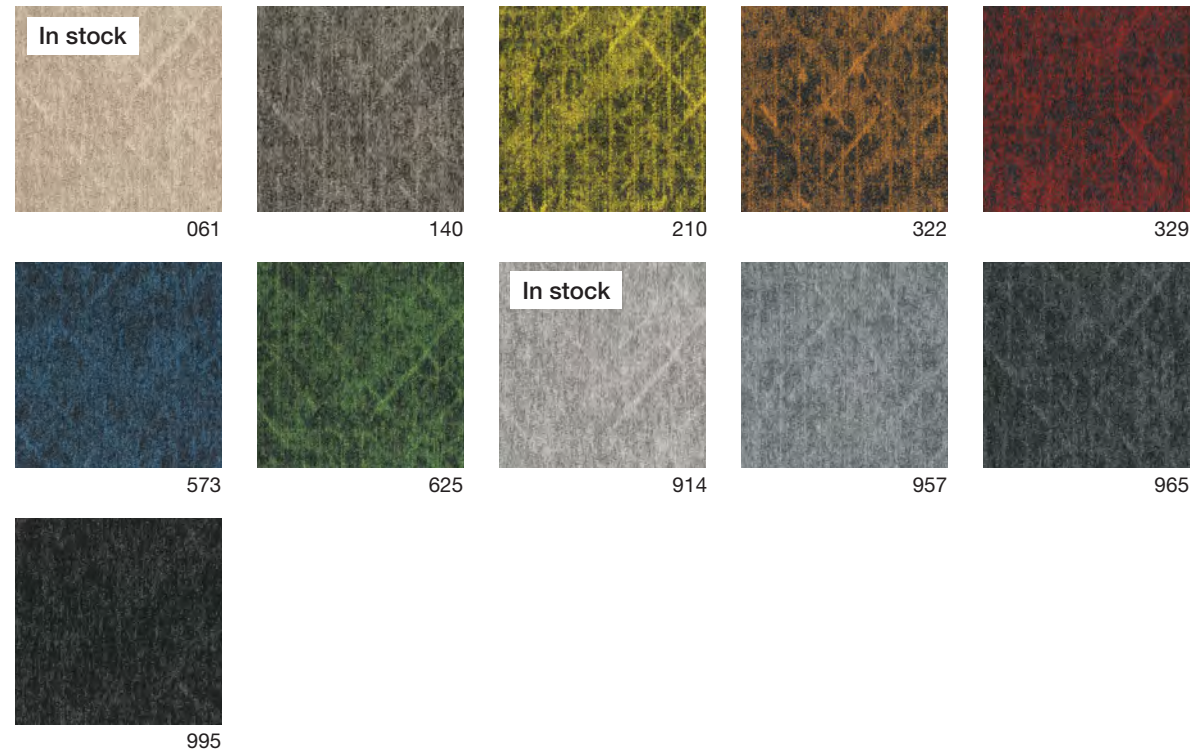


FIRST SWAY

PART OF THE FIRST DESIGN CONCEPT

With this collection, every step becomes an opportunity to surprise and delight, as the dynamic patterns and textures come together to create an ever-changing visual spectacle. Just as a dance performance is a blend of precision and artistry, First Sway balances functionality and aesthetics to elevate your space to new heights.

AVAILABLE COLOURS



 Also available
in broadloom



FIRST SWAY 061



FIRST SWAY 061

TECHNICAL DATASHEET

CARPET TILES

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon	RUBBING FASTNESS SOLIDITÉ AU FROTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	back2back: standard carpet tile backing with minimum 70% post-industrial recycled content	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4.500 g/m² Ca. 132,8 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,067 m²K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 590 g/m² Ca. 17,4 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔLw: 22 dB
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 360 g/m² Ca. 10,6 oz./yd²	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 αw: 0,15 Hz 125 250 500 1000 2000 4000 αs 0,00 0,00 0,06 0,15 0,28 0,31
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 6,5 mm Ca. 0,26"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE HEIGHT ÉPAISSEUR DU VELOURS POOLDICKE POOLHOOGTE	Ca. 2,7 mm Ca. 0,11"	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10⁶ Ohm
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,124 g/cm³ Ca. 3.344 oz./yd³	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19,7" x 19,7" box: 5 m² 5,98 yd² pallet: 20 boxes
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 202.000 /m² Ca. 168.896 /yd²	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	11
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC1	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2 %
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A : continuous use	GUT-NR	0D39C087
FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 Bfl -s1	LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.



modulyss®