

Flooring Collection 25+



MORE FROM WOOD.









Blue Angel

Awarded Germany's best-known environmental label Blue Angel guarantees that our flooring is low in emissions and pollutants and poses no health risks. It stands for a responsible use of resources.



EU Ecolabel*

Demanding sustainability label from the European Commission

The EU Ecolabel provides good guidance for environmentally friendly products. Our products fulfill high environmental standards in raw material extraction, production, distribution and disposal.



A+

Emission-tested product in accordance with the French assessment system

The emissions certificate provides information on compliance with limit values for formaldehyde and 10 other individual substances. With class A+, our products are particularly low in emissions.



Μ1

Emission classification for building materials

The Scandinavian test mark sets requirements for emissions of VOCs, formaldehyde, ammonia and other substances. Our products achieve the best category M1 = low emission.



More about healthy living and the sustainability of our flooring:

» to.egger.link/live-healthy

STYLES

Inspiring variety:

Discover the right flooring for your style.

Let our interior styles inspire you.









we bring harmony to every room.

Klaus-Dieter Monhoff Head of Design and Decor Management




Classic


Everyone's floor.

No matter how busy your life is, Egger Laminate Flooring turns a space into your home. Made from the renewable raw material wood, it is available in many attractive decors and flooring board formats. The lightfast, scratch and impact-resistant surface withstands the challenges of everyday life and is easy to clean. It is a good companion for underfloor heating and, thanks to the click system, it is easy to install. Egger Laminate Flooring is the proven, affordable choice for DIY practitioners and anyone who likes to keep things simple.



Three good reasons for a laminate floor









Aqua 🛂


The water-resistant all-rounder.

The versatile Aqua Laminate Flooring is designed to withstand various challenges. Its waterproof Aqua CLIC it! click system makes it suitable for any room, providing reliable protection against moisture and ensuring straightforward and adaptable installation. Additionally, the flooring is stain- resistant, easy to clean, scratch and impact-resistant, anti- slip, and resistant to fading. Its visually appealing decors and natural-looking surfaces add to its overall appeal.



EL2181

Three good reasons for a laminate Aqua floor





Sustainable and suitable for healthy living

8/31 Originals



PL2821 Livingston Oak tobacco Art.No.: 628282



PL2772 Mansonia Walnut Art.No.: 628312



PL2970 Natural North Oak Art.No.: 628220



PL2953 Natural Lausanne Oak Art.No.: 628374

8/32 Castle



EL2974 Light Matera Oak Art.No.: 593672



EL2730 Light Amiens Oak Art.No.: 593191



241

EL2090 Conway Oak Art.No.: 592736



EL1307 Brown Warmia Walnut Art.No.: 592774



EL1096 White Sheffield Acacia Art.No.: 593979



EL2063 Light Grey Soria Oak Art.No.: 593573



EL2027 Natural Victoria Oak Art.No.: 593894



EL2856 Honey Olchon Oak Art.No.: 593252



EL2406 Light Grey Sherman Oak Art.No.: 593351



EL2065 Grey Soria Oak Art.No.: 593610



EL2191 Brown Turin Oak Art.No.: 592606

10/33 Traffic+



EL2181 Natural Treviso Oak Art.No.: 591685



EL2184 Grey Treviso Oak Art.No.: 591784



EL2973 Natural Valley Oak Art.No.: 591548



EL2402
Cognac Brown Sherman Oak
Art.No.: 591470

8/32 Casa



EL2161 Cream Newport Oak Art.No.: 594181



EL2928 Natural Starwell Oak Art.No.: 594129



241

EL2135 Grey Baronia Oak Art.No.: 594105

8/32 Chevron



EL202F Light Rillington Oak Art.No.: 591302



EL203F Dark Rillington Oak Art.No.: 591326



EL291F Honey Skanderborg Oak Art.No.: 591265



Originals

Livingston Oak tobacco

Decor-No.: PL2821


Art.No.: **628282** 8/31 Classic Skirting: **L421**











1.9948 m² | 15 kg



Originals

Mansonia Walnut


Decor-No.: **PL2772**

Art.No.: **628312** 8/31 Classic Skirting: L695










1.9948 m² | 15 kg

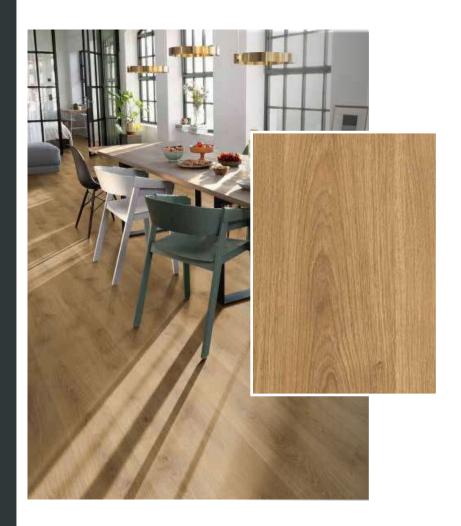

Originals

Natural North Oak

Decor-No.: **PL2970**


Art.No.: **628220 8/31 Classic** Skirting: **L633**











1.9948 m² | 15 kg



Originals

Natural Lausanne Oak

Decor-No.: **PL2953**


Art.No.: **628374 8/31 Classic** Skirting: **L662**











1.9948 m² | 15 kg



Light Matera Oak

Decor-No.: **EL2974**


Art.No.: **593672 8/32 Classic** Skirting: **L651**











1.9948 m² | 15 kg



Castle

Light Amiens Oak

Decor-No.: **EL2730**


Art.No.: **593191 8/32 Classic** Skirting: **L629**











1.9948 m² | 15 kg



Conway Oak

Decor-No.: **EL2090**


Art.No.: **592736 8/32 Classic** Skirting: **L684**











1.9948 m² | 15 kg



Castle

Brown Warmia Walnut

Decor-No.: **EL1307**

Art.No.: **592774 8/32 Classic** Skirting: **L681**














1.9948 m² | 15 kg



White Sheffield Acacia

Decor-No.: **EL1096**

Art.No.: **593979 8/32 Classic** Skirting: **L610**
















1.9948 m² | 15 kg



Castle

Light Grey Soria Oak

Decor-No.: **EL2063**

Art.No.: **593573 8/32 Classic** Skirting: **L583**
















1.9948 m² | 15 kg



Natural Victoria Oak

Decor-No.: **EL2027**

Art.No.: 593894 8/32 Classic Skirting: **L612**


















1.9948 m² | 15 kg



Castle

Honey Olchon Oak

Decor-No.: **EL2856**

Art.No.: **593252** 8/32 Classic Skirting: **L642**
















1.9948 m² | 15 kg



Light Grey Sherman Oak

Decor-No.: **EL2406**

Art.No.: **593351 8/32 Classic** Skirting: **L596**
















1.9948 m² | 15 kg



Castle

Grey Soria Oak

Decor-No.: EL2065

Art.No.: **593610 8/32 Classic** Skirting: **L585**
















1.9948 m² | 15 kg



Brown Turin Oak

Decor-No.: **EL2191**

Art.No.: **592606 8/32 Classic** Skirting: **L742**
















1.9948 m² | 15 kg



Traffic+

Natural Treviso Oak

Decor-No.: **EL2181**

Art.No.: **591685 10/33 Classic**Skirting: **L716**
















1.7455 m² | 16 kg



Traffic+

Grey Treviso Oak

Decor-No.: **EL2184**

Art.No.: **591784 10/33 Classic**Skirting: **L740**
















1.7455 m² | 16 kg



Traffic+

Natural Valley Oak

Decor-No.: **EL2973**

Art.No.: **591548** 10/33 Classic Skirting: L655
















1.7455 m² | 16 kg

Traffic+

Cognac Brown Sherman Oak



Art.No.: **591470** 10/33 Classic Skirting: L589
















1.7455 m² | 16 kg





Casa

Natural Starwell Oak

Decor-No.: **EL2928**

Art.No.: 594129 8/32 Medium Skirting: L665
















1.3954 m² | 10 kg



Casa

Grey Baronia Oak

Decor-No.: **EL2135**

Art.No.: **594105** 8/32 Medium Skirting: L653
















1.3954 m² | 10 kg



Casa

Cream Newport Oak

Decor-No.: **EL2161**

Art.No.: **594181 8/32 Medium**Skirting: **L717**
















1.3954 m² | 10 kg



Chevron

Light Rillington Oak

Decor-No.: **EL202F**


Art.No.: **591302 8/32 Kingsize**Skirting: **L636**











2.5349 m² | 19 kg



Chevron

Dark Rillington Oak

Decor-No.: **EL203F**


Art.No.: **591326 8/32 Kingsize** Skirting: **L368**











2.5349 m² | 19 kg



Chevron

Honey Skanderborg Oak

Decor-No.: **EL291F**


Art.No.: **591265 8/32 Kingsize** Skirting: **L706**












2.5349 m² | 19 kg



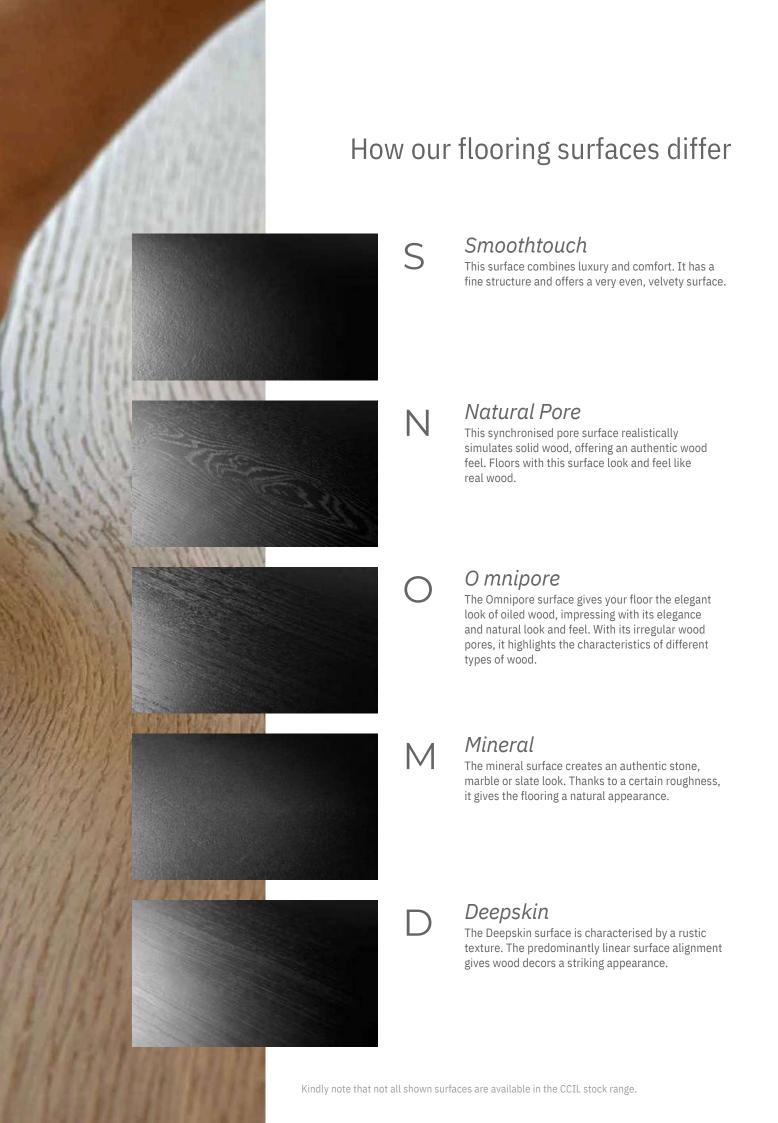

For design with a format.

With a harmonious floor decor and deliberately selected colour tone, you can give every room the desired atmosphere. In addition, the grain and texture of the decor soothes or livens up the appearance of the room. You can also achieve that little bit extra by choosing the right flooring board format. Large rooms are optimally accentuated by long, wide flooring boards, while small rooms appear larger with short, narrow flooring boards.

Classic

Suitable for any room thanks to its balanced proportions.

Large

Accentuates large spaces and brings out the best in country house decors.

Kingsize

These boards create drama in large rooms, in both the wood and tile decors.

Long

Ideal for large-scale room design and open living, e.g. with a living room kitchen. It also increases the effect of long, narrow rooms.

Medium

The ideal solution for small spaces.

Herringbone

The straightforward solution for an elegant parquet look.

Technical highlights:

This is what our floors can do.

Our Laminate Flooring is designed layer by layer and does not contain PVC or plasticizers.



- 1. The robust, highly wear-resistant surface protects against scratches, UV light and the small accidents of everyday life
- 2. Decor paper for an attractive look
- 3. Wood-based HDF+ core board with dependable swell protection
- 4. Balancer paper stabilises and protects against deformation
- **5. CLIC it! click system** for straightforward and dependable installation

Aqua 🎿

Aqua Laminate Flooring is a real all-rounder that can be used in bathrooms and kitchens thanks to the waterproof profile seal.



- 1. The robust, highly wear-resistant surface protects against scratches, UV light and the small accidents of everyday life
- 2. Decor paper for an attractive look
- 3. Wood-based HDF+ core board with dependable swell protection
- **4. Balancer paper** stabilises and protects against deformation
- 5. The Aqua CLIC it! click system protects dependably against infiltrating humidity and guarantees straightforward installation



Technical Data Sheet



Quality management ISO 9001:2015 Code TDEL001

Revision 04

EGGER Laminate Flooring

Coreboard HDF swell barrier plus (emission standard E1, CARB2/TSCA VI)

Profile CLIC it!

Declared performance according to EN 14041

Formaldehyde according to EN 717-1	E1		Slip resistance according to EN 13893	DS, ≥ 0,3
Thermal conductivity according to EN 12667	0,12 W/(m*K)		Antistatic properties according EN 1815	yes, < 2 kV
Fire classification according to EN 13501-1	Cfl-s1	-		

Classification and general requirements according to EN 13329

Class of use	31	32	33
Guarantee domestic area	15 years	20 years	25 years
Guarantee comercial area	5 years	5 years	5 years
Abrasion resistance, test methode A according EN 13329, Annex E	AC3 / ≥ 2.000 cycles	AC4 / ≥ 4.000 cycles	AC5 / ≥ 6.000 cycles
Impact resistance, test methods "small/ big ball" according EN 13329, Annex H	≥ 8 N ≥ 500 mm	≥ 12 N ≥ 750 mm	≥ 15 N ≥ 1.000 mm
Resistance to staining EN 438 - 2	group 1 + 2: level 5 group 3: level 4	group 1 + 2: level 5 group 3: level 4	group 1 + 2: level 5 group 3: level 4
Thickness swelling according ISO 24336	≤ 18 %	≤ 18 %	≤ 15 %
Static indentation by constant pressure according ISO 24343-1	≤ 0,05 mm	≤ 0,05 mm	≤ 0,05 mm
Effect of furniture leg according EN 424 (foot Type 0)	No change in appearance or damage	No change in appearance or damage	No change in appearance or damage
Effect of a castor chair according EN 425	25.000 cycles	25.000 cycles	25.000 cycles
Profile strength lengthways / crossways according to ISO 24334	no requirement	≥ 1,0 kN/m / ≥ 2,0 kN/m	≥ 1,0 kN/m / ≥ 2,0 kN/m
Dimensional tolerances of the board width ± 0,5 m width ± 0,1 m thickness ± 0,5 m		length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm

Format & Packaging

		ORIGINALS	CASTLE	TRAFFIC+	CASA	CHEVRON
Measurements mm (Length	x Width)	1292 x 193	1292 x 193	1292 x 193	1292 x 135	1292 x 327
Total thickness		8 mm	8 mm	10 mm	8 mm	8 mm
Class of use 31		✓	✓			
Class of use 32		✓	✓	✓	✓	✓
Class of use 33		✓	✓	✓		
Bevel, without		✓	✓			
Bevel, Lengthwise		✓	✓			✓
Bevel, circumferential		✓	✓	✓	✓	✓
Bevel, circumferential + 1						✓
Packet information	Piece	8	8	7	8	6
	m²	1,99	1,99	1,75	1,40	2,53
	kg (+/- 5%)	14,54	14,54	15,99	10,15	18,31
Pallet information	Packet per pallet	60	60	52	75	40
_	m²	119,69	119,69	90,77	104,65	101,40
	kg (+/- 5%)	872	872	857	799	763













General information

Careful inspection of incoming materials is an essential part of any business transaction. Handling and storage of the flooring must be done with care. The flooring packages must be stored on level and dry ground, protected from weather in a closed building. We recommend conditioning the end products for at least 48 hours before installation according to the expected room climate (> 18 °C, 40 - 70 % relative humidity). Acclimatising takes place packed, lying flat with a minimum distance of 50 cm to all walls. Before and during installation, the floor elements must be checked for possible defects. Damaged flooring boards or those that differ from the norm should not be installed but returned to the supplier to be replaced. For more information, please visit www.egger.com

Environmental and Health

The product has Type I, Type II and Type III eco-labels:

- EPD (Environmental Product Declaration) including externally verified life cycle assessment according to EN 15804
- environmental supplier declaration (Environmental and Health Datasheet)
- · Blauer Engel, Greenguard, M1
- further information on the circular economy and sustainability can be found at www.egger.com/ecofacts.

EGGER laminate flooring consists of 83% renewable raw materials. The raw material wood absorbs CO2 during its growth and stores it. CO2 is emitted during transport and processing. The difference between the storage and the emission results in a CO2 footprint of $-6 \text{ kg CO2 per 1 m}^2 \text{ of laminate flooring.}$

Colour matching and surface texture

As slight colour variations occur due to inherent variations in the substrate, we recommend that components used next to each other – in one flooring surface – are selected from the same production batch to ensure colour uniformity or colour consistency.

Suitability for underfloor heating

EGGER floors are suitable for hot water underfloor heating and electric underfloor heating. The surface temperature of the heated flooring structure must not exceed 28° C and heating up too quickly must be avoided. Installation on surface heating systems with night storage function is not permitted. EGGER laminate floors may only be installed on electric flat / foil heating systems that are equipped with temperature sensors and controllers.

Total thickness	7 mm	8 mm	10 mm	12 mm
R [(m²*K)/W]	0.06	0.07	0.08	0.10
R [(m²*K)/W] (+ Silenzio easy)	0.12	0.14	0.14	0.16
R [(m²*K)/W] (+ Silenzio Duo)	0.10	0.09	0.11	0.12

Accessories

When installing the floor, we recommend EGGER's own range of accessories with the product groups: EGGER Silenzio underlay mats, the matching MDF skirting boards, as well as many other accessories that are perfectly colour-coordinated with the flooring range on offer. You will find further information at www.egger.com.

A note on validity

This technical data sheet has been carefully drawn up to the best of our knowledge. It is intended for information only and does not constitute a guarantee in terms of product properties or suitability for specific applications. We accept no liability for any mistakes, errors in standards, or printing errors. In addition, technical changes may result from the further development of EGGER flooring as well as changes to standards and public law documents. This technical data sheet is not an instruction for use and is not a legally binding document.





MORE FROM WOOD.